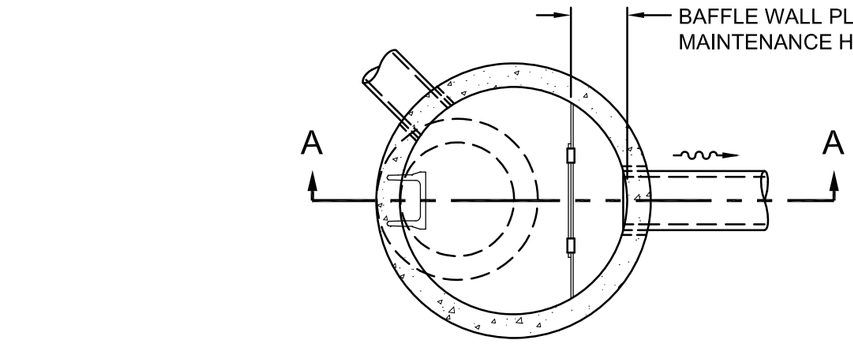

PLAN

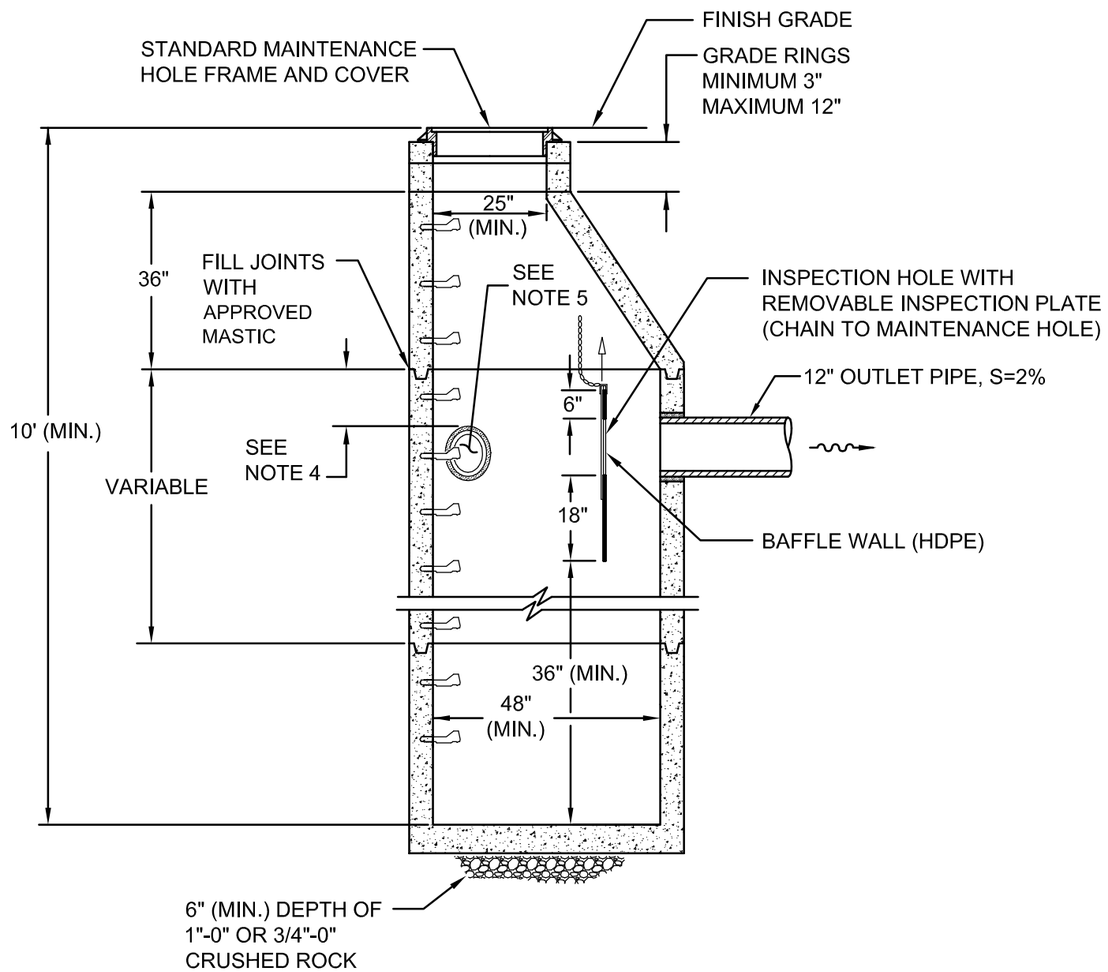

SECTION A-A

NOTES:

1. ALL PRECAST SECTIONS SHALL CONFORM TO THE REQUIREMENTS OF THE CITY OF PORTLAND MANUFACTURING STANDARDS FOR PRECAST CONCRETE PRODUCTS (MSPCP), AS REVISED.

2. MAINTENANCE HOLE STEPS – REFER TO THE STANDARD DETAIL P-168.

3. PROVIDE A FLEXIBLE JOINT FOR ALL CONNECTED PIPES:
   - RIGID PIPE < 36 INCHES – 18 INCHES (MAX.) FROM OUTSIDE WALL
   - FLEXIBLE PIPE – 18 INCHES (MAX.) FROM THE OUTSIDE WALL UNLESS A FLEXIBLE JOINT FITTING IS INSTALLED AND ACCEPTED.

4. PROVIDE 12 INCHES (MIN.) OF SEPARATION BETWEEN A SECTION JOINT AND THE OUTER EDGE OF ANY OPENING.

5. LOCATE INVERT OF ANY INLET LEAD 6 INCHES (MIN.) ABOVE THE OUTLET PIPE INVERT.

6. BAFFLE WALL AND THE REMOVABLE INSPECTION PLATE MATERIAL SHALL BE 1/2 INCH THICK HIGH DENSITY POLYETHYLENE (HDPE) FLAT STOCK. SECURE BAFFLE WALL TO MAINTENANCE HOLE WALL WITH SIX STAINLESS STEEL BRACKETS (MIN).

7. PROVIDE A 12 INCH DIA. INSPECTION HOLE CENTERED IN THE BAFFLE WALL. CHAIN REMOVABLE PLATE TO MAINTENANCE HOLE WALL.

The selection and use of this Standard Detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user.

Note:
All material and workmanship shall be in accordance with the City of Portland Standard Construction Specifications.

Bureau of Environmental Services
CITY OF PORTLAND, OREGON
William Ryan
Digitally signed by William Ryan
Date: 2020.08.31 13:48:57 -07'00'
Chief Engineer

Standard Detail Title

Sedimentation Maintenance Hole with Baffle

Effective Date: 01-01-09

Calc. Book No.: N/A

Baseline Report Date: N/A

Standard Detail No.

P-162

P-162_SED_MANHOLE_BAFFLE.DWG 8/20/20 11:02 AM DANPE