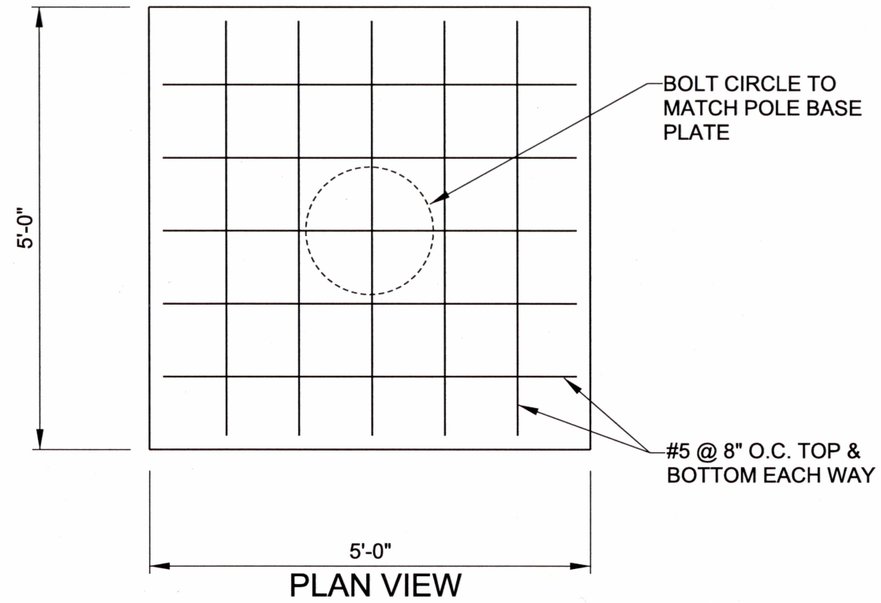

PLAN VIEW

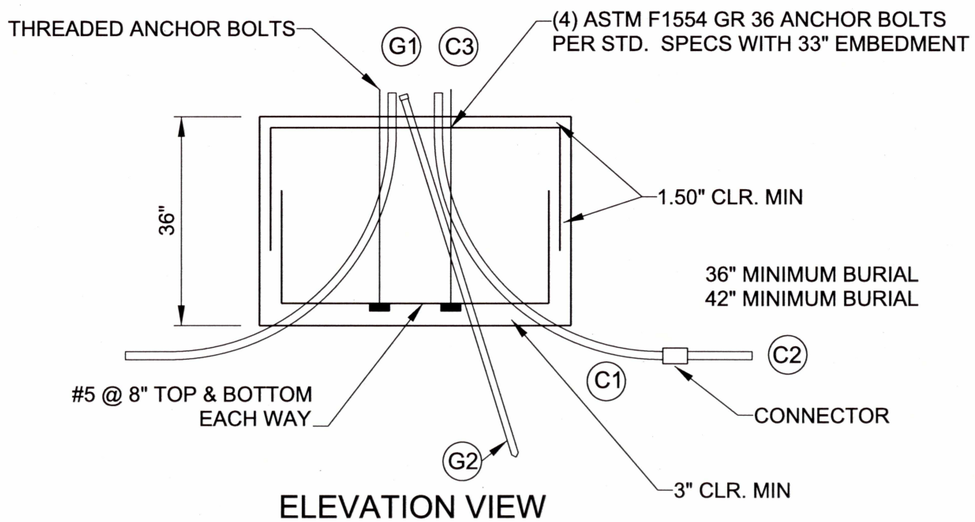

ELEVATION VIEW

SPECIAL SPREAD FOOTING FOR ORNAMENTAL POLES

NOT TO SCALE

GROUND ROD:
G1.- MINIMUM 3" EXPOSURE AT TOP OF FOUNDATION, WITHIN BOLT CIRCLE. GROUND ROD TO BE INSTALLED AVOIDING UNDERGROUND OBSTRUCTIONS.
G2.- GROUND ROD SHALL BE MINIMUM 0.625" DIA. X 8' LONG, COPPERCLAD.

CONDUIT:
C1.- CONDUIT SHALL BE RGS IN CONCRETE WITH 6" MINIMUM STUB-OUT
C2.- SERVICE AND FEED CONDUITS SHALL BE RGS OR PVC, AS REQUIRED.
C3.- STUB UP TO WITHIN 4" FROM HAND HOLE.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user.

BUREAU OF TRANSPORTATION
CITY OF PORTLAND, OREGON
Steve Townsend
Chief Engineer

Standard Drawing Title

STREET LIGHTING
SPECIAL LIGHT POLE SPREAD
FOOTING FOR ORNAMENTAL POLES

Note:
All material and workmanship shall be in accordance with the City of Portland Standard Construction Specifications.

Effective Date: 05-10-12
Calc. Book No.:
Baseline Report Date:

Standard Drawing No.
P-664

Plot Date: 5/10/2012 12:00:49 PM